

## Tempo 2 Hole Bath Shower Mixer

### Illustrated

**B0731** Tempo 2 hole bath shower mixer

**B9400** Idealrain S1 handspray 1 function 80mm

### Configuration options

**A5901** TMV Thermostatic mixing valve 22mm

### Material

Chrome Plated

### Weights

B0731 3.27KG

B9400 0.27KG

### Colours

Chromium plated (AA)

### Special Notes

Suitable for balanced or unbalanced supplies. Inlets suitable for 22mm copper tubes. It is recommended that a thermostatic blending valve such as A5901AA should be used.

### Designer

Artefakt Industriekultur

### Flow rates

30 Litres per minute @ 3 bar pressure


### Frequently used applications

Hotels

Public Building

Office

Residential

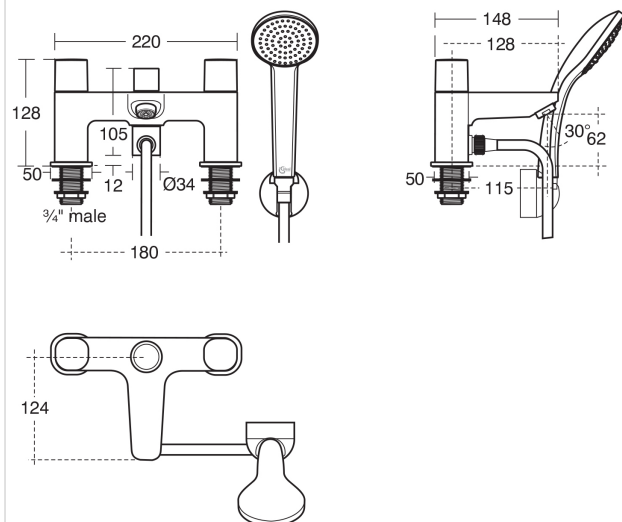

Email: [info@idealspec.co.uk](mailto:info@idealspec.co.uk)  
Tel: 0870 122 8822  
Fax: 0870 122 8282  
Web: [www.idealspec.co.uk](http://www.idealspec.co.uk)

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.



Date created: 02/06/2015